

# Energizer

ULTIMATE LITHIUM™

## Ultimate Lithium™ AA



AA / FR6

## World's Longest Lasting AA battery!

### Excellent Low Temp Performance

Operates from -40°F to 140°F (-40°C to 60°C).

### Lightweight

Up to 33% lighter than Alkaline.

### 25 Year Shelf Life

### 100% leak proof based on standard use

### Interchangeability

Interchangeable with other 1.5V batteries of the same size.

### Safety

Includes a PTC (resettable over current protection) and a vent release mechanism. Compliant with all industry battery standards including ANSI, IEC, UL and UN. Certified for intrinsic safety (ATEX Directive 2014/34/EU).


### Environmental

Compliant with applicable EU regulations. Non-PVC label.

### AA Device Comparison

Typical Performance at 20°C

■ AA Lithium ■ AA Alkaline

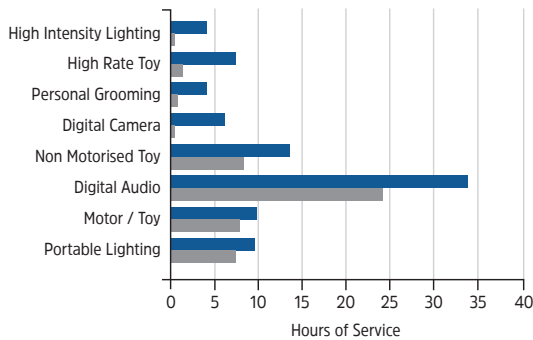


Hundreds more photos vs. Alkaline are supported

### Milliamp-Hours Capacity

Constant Current Discharge to 0.8 Volts

— AA Lithium — AA Alkaline

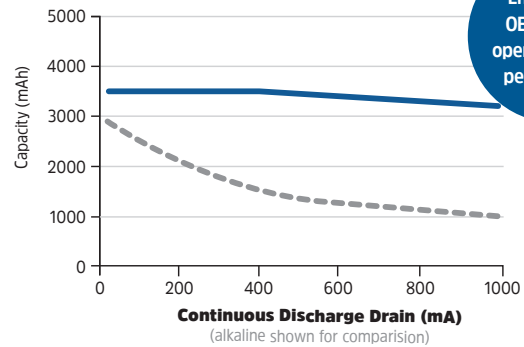


Ensure your OEM devices operate at peak performance

### Temperature Effects on Capacity

Constant Current Discharge

— 25 mA - - 250 mA ··· 1000 mA

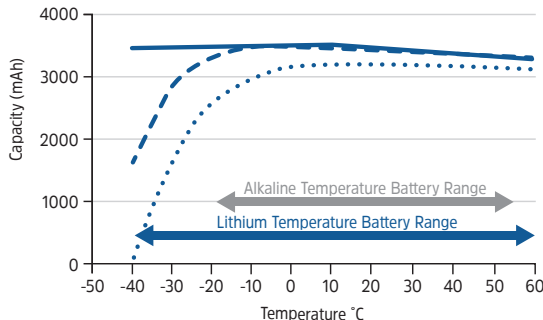

### FOR MORE INFORMATION

Product sheets and technical specifications available through: [www.energizer.com/OEM](http://www.energizer.com/OEM) or directly from your account representative.

**AMERICAS:** Americas.OEM@energizer.com

**APAC:** APAC.OEM@energizer.com

**EMEA:** EMEA.OEM@energizer.com

### Important Notice

This document contains typical information specific to products manufactured at the time of its publication. Products tested in accordance with IEC 60086-2 and ANSI C18.1M standards. © Energizer - Contents herein do not constitute a warranty.

# Energizer®

ULTIMATE LITHIUM™

## Ultimate Lithium™ AA

AA/FR6



## 世界上最持久耐用的 AA 电池

### 电池在低温环境下的优异性能

电池能於 -40°F 至 140°F (-40°C 至 60°C) 温度范围内稳定运行

### 轻量级

比碱性电池轻 33%

### 25 年保质期

基于标准使用情况下百分百防漏液

### 可互换性

可与其他同尺寸的1.5V电池互换。

### 安全性

随附 PTC (可复位过电流保护) 和排气释放机理。符合所有行业电池标准, 包括 ANSI、IEC、UL 和 UN。通过本质安全认证 (ATEX Directive 2014/34/EU)。


### 环保性

符合适用的欧盟法规。非 PVC 标签。

### 可使用AA电池的电子设备的比较

20°C时的典型性能表现

■ AA 锂电池 ■ AA 碱性电池

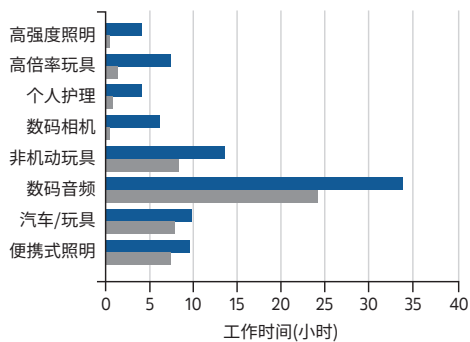


AA锂电池比AA碱性电池可多拍百张照片

### 毫安 - 小时容量

恒流放电至 0.8 伏


— AA 锂电池 — AA 碱性电池

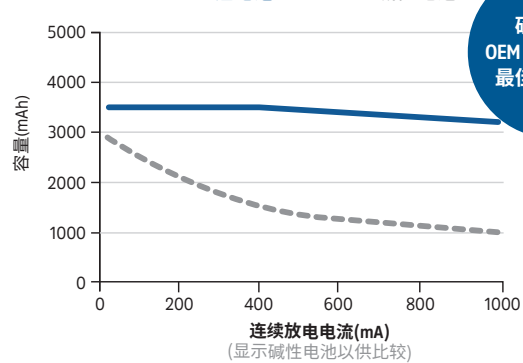

### 温度对电池容量的影响

恒流放电

— 25 mA — 250 mA ••• 1000 mA

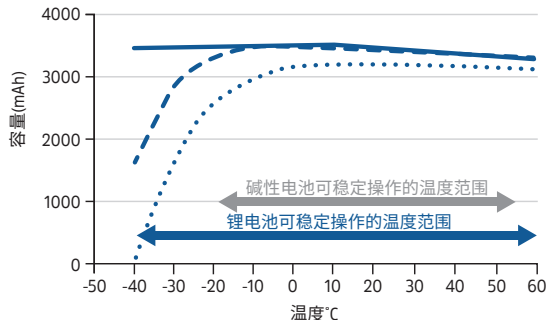

### 想了解更多信息

欲取更多产品资讯和了解技术规格, 可通过以下方式获取: [www.energizer.com/OEM](http://www.energizer.com/OEM) 或直接跟您的客户代表联络获取。

美洲地区: [Americas.OEM@energizer.com](mailto:Americas.OEM@energizer.com)

亚太地区: [APAC.OEM@energizer.com](mailto:APAC.OEM@energizer.com)

欧洲、中东和非洲地区: [EMEA.OEM@energizer.com](mailto:EMEA.OEM@energizer.com)

### 重要提示

本文档包含在其发布时所製造的产品的相關典型信息。产品测试符合 IEC 60086-2 和 ANSI C18.1M 标准。

© Energizer - Contents herein do not constitute a warranty.